# **UPort® 204/207**

–4 and 7-port entry-level USB hubs



- > Hi-Speed USB 2.0 for up to 480 Mbps of USB transmission
- > USB-IF certification
- > Compatible with USB 1.1 devices
- > 15 KV ESD Level 4 protection for all USB ports
- > Wall mountable
- > Comprehensive diagnostic LEDs
- > Full 500 mA of power per port
- > Choose bus power or external power (UPort 204 only)



## : Introduction

The UPort® 204 and UPort® 207 are entry-level USB 2.0 hubs that expand 1 USB port into 4 and 7 USB ports, respectively. The hubs are designed to provide true USB 2.0 Hi-Speed 480 Mbps data transmission through each port, even for heavy-load applications. The

## **USB-IF** Certification

The UPort® 204/207 USB 2.0 entry-level USB hubs are USB-IF (USB Implementers Forum) certified. USB-IF verifies a number of strict electrical requirements for the Hi-Speed USB operation of USB hubs designed to the USB 2.0 specification. This means that the

## **ESD** Level 4 Protection

Electrostatic discharge (ESD) could be as severe as having more than one thousand volts of ESD with a high rise time (dv/dt) break through the junction layer of protective devices. In order to avoid serious

## : Specifications

#### **USB** Interface

Compliance: USB 1.1/2.0 compliant Upstream: 1 USB port (Type B connector) Downstream: UPort 204: 4 USB ports, Type A connectors UPort 207: 7 USB ports, Type A connectors

Speed: 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB) Supply Current: 500 mA max. per channel

#### **Physical Characteristics**

Housing: Polycarbonate (PC) Weight: (product only) UPort 204: 800 g (1.76 lb) UPort 207: 875 g (1.93 lb) Dimensions:

UPort 204: 70 x 35 x 120 mm (2.76 x 1.38 x 4.72 in) UPort 207: 80 x 35 x 185 mm (3.15 x 1.38 x 4.72 in)

#### **Environmental Limits**

Operating Temperature: 0 to 60°C (32 to 140°F) Storage Temperature: -20 to 75°C (-4 to 167°F) Ambient Relative Humidity: 5 to 95% (non-condensing) Altitude: Up to 2000 m Note: Please contact Moxa if you require products guaranteed to function properly at higher altitudes. UPort® 204/207 have received USB-IF Hi-Speed certification and are fully Plug & Play. 500 mA of power per port ensures that your USB devices will function properly and use of 12-40 VDC power makes them ideal for mobile applications. Externally USB hubs provide a broad USB device compatibility.

UPort® 204/207 support Hi-Speed USB 2.0 for up to 480 Mbps USB transmission (fully compliant with interoperability requirements) has enough power for devices to function and provides for a successful transition back to high-speed operation from the suspend state.

damage, Moxa's UPortB 204/207 USB hubs provide ESD level 4 (contact 8 KV, air 15 KV) protection, which increases the quality and value of the user's end-product.

#### **Standards and Certifications**

Safety: UL 508, LVD EMC: CE, FCC EMI: EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4, FCC Part 15 Subpart B Class A EMS: EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11 Green Product: RoHS, CROHS, WEEE Deuver Bocuizemente


#### **Power Requirements**

Input Voltage: 12 to 40 VDC external power Power Consumption: UPort 204: 1210 mA @ 12 VDC, 610 mA @ 24 VDC, 430 mA @ 36 VDC UPort 207: 2170 mA @ 12 VDC, 1070 mA @ 24 VDC, 730 mA @ 36 VDC MTBF (mean time between failures) Time: UPort 204: 1,577,573 hrs

UPort 207: 1,059,201 hrs Database: Telcordia (Bellcore), GB

## Warranty

Warranty Period: 5 years Details: See www.moxa.com/warranty

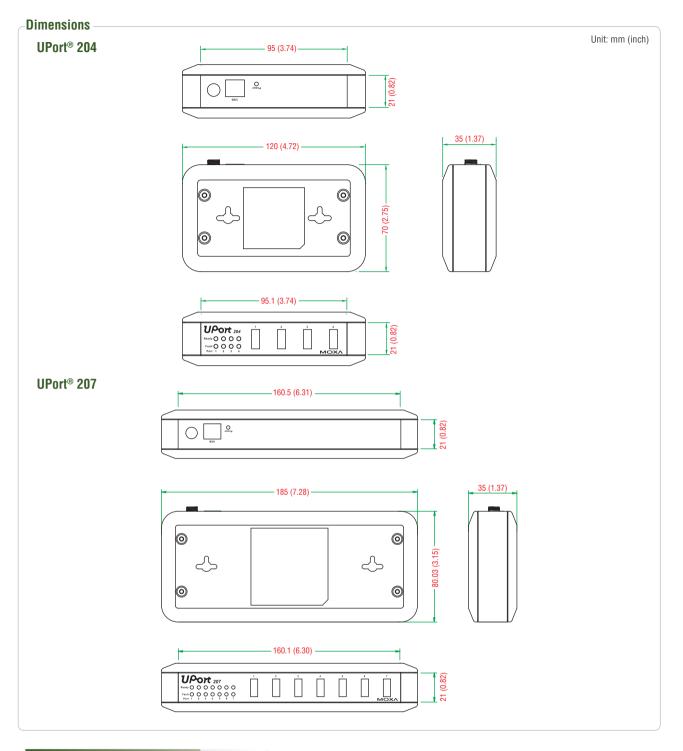

## **Crdering Information**

MOXA

## Available Models

UPort 204: 4-port entry-level USB hub, adaptor included UPort 207: 7-port entry-level USB hub, adaptor included Optional Accessories (can be purchased separately) PWR-12300-WP-S1: 100-240 VAC to 12 VDC @ 3 A power adaptor (Note: Power cord not included with power adaptor) PWR-Plug-USJP-01: US /JP plug, 2-pin power cord PWR-Plug-UK-01: UK plug, 2-pin power cord PWR-Plug-EU-01: EU plug, 2-pin power cord PWR-Plug-AU-01: SAA plug, 2-pin power cord PWR-Plug-CN-01: CN plug, 2-pin power cord

#### Package Checklist

- 1 UPort 204 or UPort 207 entry-level USB hub
- USB-IF certified cable
- Power adaptor
- Quick installation guide (printed)
- Warranty card